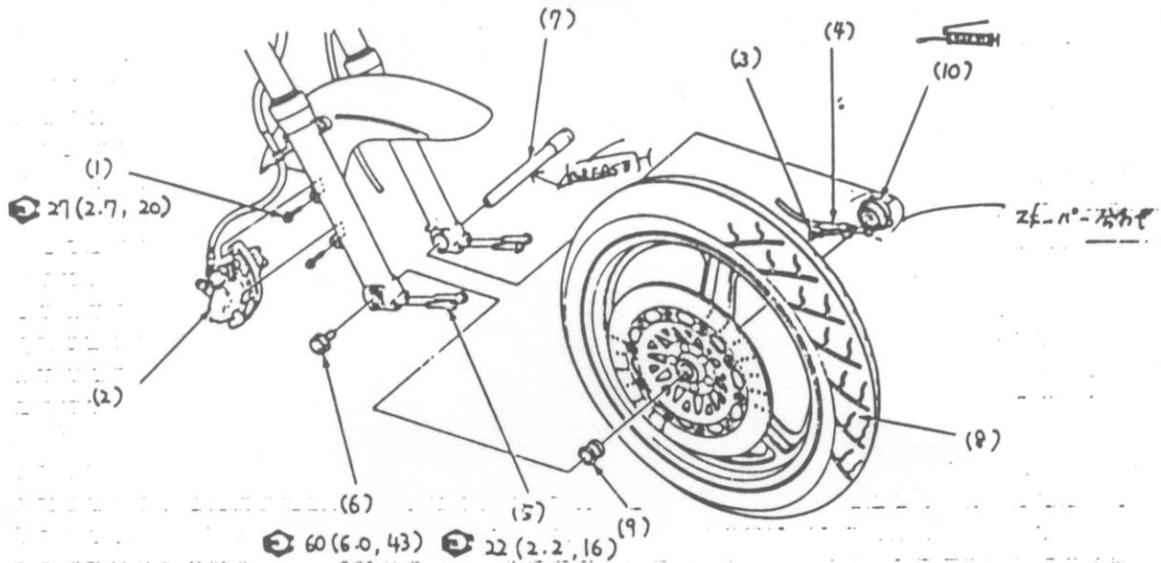


Front Wheel Removal/Installation

**WARNING**

- A contaminated brake-disc or pad reduces stopping ability.

NOTE

- Do not apply the brake lever after the front wheel is removed.
- Do not add more than 60 grams to the wheel balance weight.
- Thin coat clean grease to the front axle before installation.

Requisite Service

- Raise the front wheel off the ground and support the motorcycle.

| Procedure | Q'ty | Remarks |
|---------------------------------|------|--|
| (1) Removal Order | | |
| (1) Calliper mounting bolt | 2 | Installation is in the reverse order of removal. |
| (2) Calliper assembly | 1 | |
| (3) Speedometer cable set screw | 1 | |
| (4) Speedometer cable | 1 | At installation, align the gear box with the fork leg stopper. |
| (5) Axle holder bolt | 4 | |
| (6) Axle bolt | 1 | |
| (7) Front axle | 1 | |
| (8) Front tire | 1 | |
| (9) Left side collar | 1 | |
| (10) Speedometer gear box | 1 | |