


# Rear Brake Pad Replacement

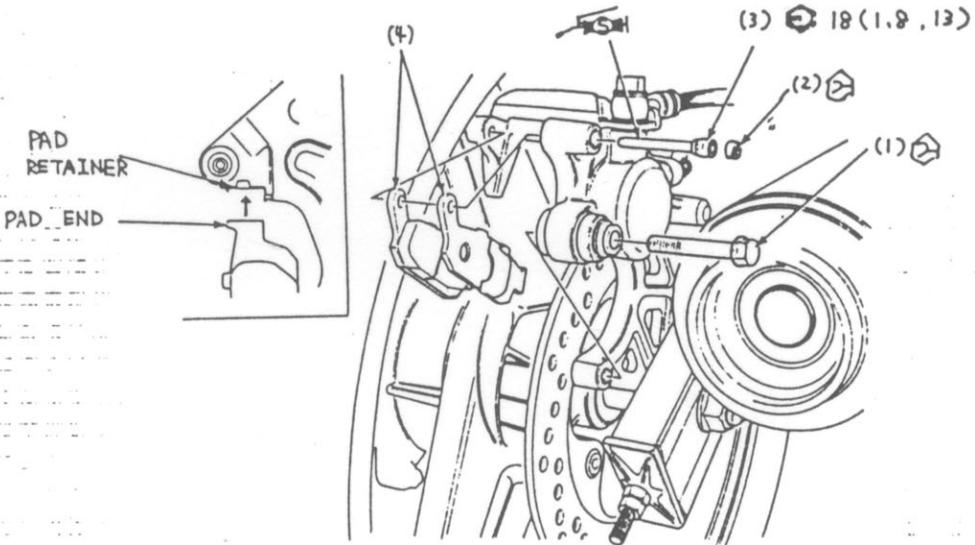

**WARNING**

- Do not get grease on the brake drum and shoes or stopping power will be reduced.
- Discard contaminated shoes and clean a contaminated drum with a high quality brake degreasing agent.

**Requisite Service**

- Brake fluid draining /air bleeding

Procedure		Q'ty	Remarks
(1)	Removal Order		Installation is in the reverse order of removal.
	Rear caliper bolt	1	
(2)	Pad pin plug	1	At installation: Apply a thin coat silicone grease. At installation:
(3)	Pad pin	1	
(4)	Rear brake pad	1	

Place the brake pad end into the bracket retainer securely.