


Rear Wheel Removal/Installation

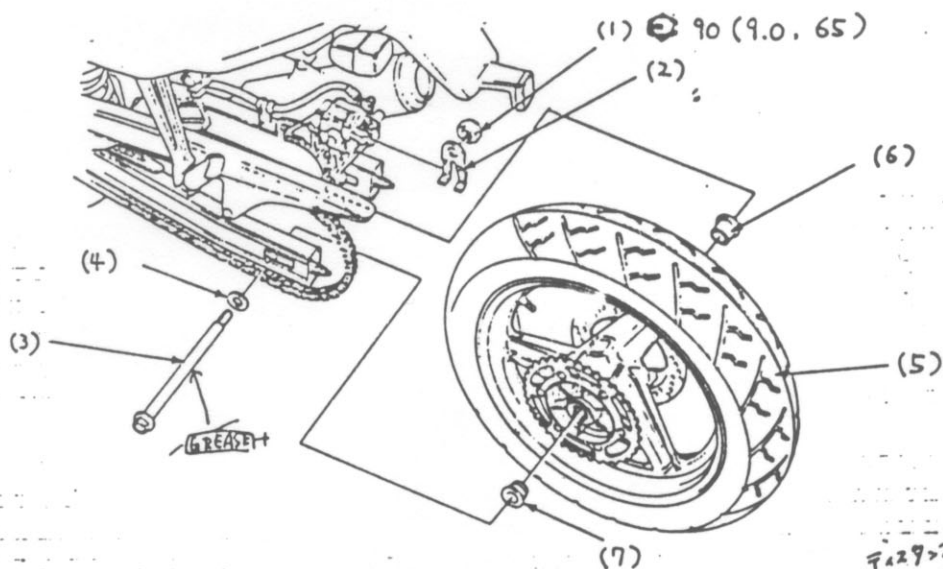

NOTE

- Do not add more than 60 grams to the wheel balance weight.
- Thin coat clean grease to the rear axle before installation.

Requisite Service

- Place the motorcycle on its center stand.
- Rear fender removal (Section 2).

Procedure		Q'ty	Remarks
(1)	Removal Order		
(1)	Rear axle nut	1	
(2)	Washer	1	
(3)	Rear axle	1	
(4)	Washer	1	
(5)	Rear wheel	1	
(6)	Right side collar	1	
(7)	Left side collar	1	
Installation Order			
(7)	Left side collar	1	
(6)	Right side collar	1	
(5)	Rear wheel	1	
(4)	Washer	1	
(3)	Rear axle	1	
(2)	Washer	1	
(1)	Rear axle nut	1	