


Radiator Removal/Installation

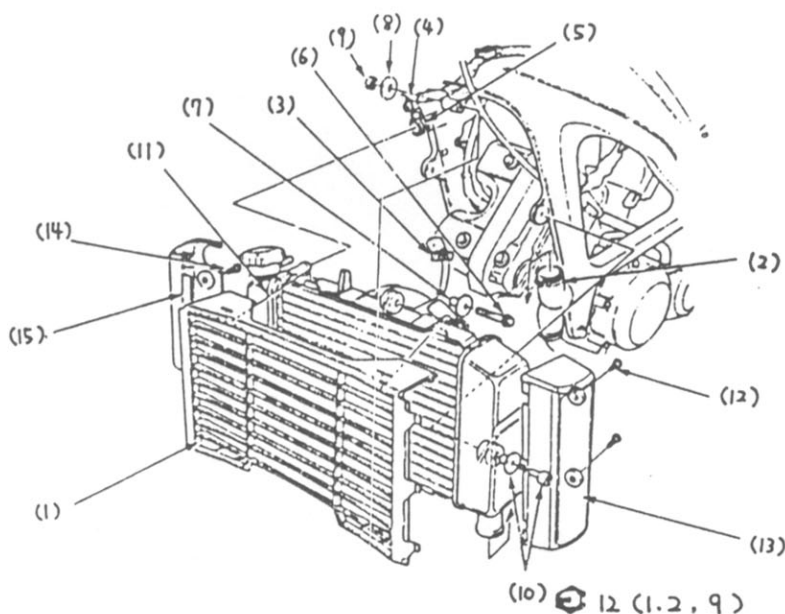

Requisite Service

5-3
• Coolant draining (page 4-8)

Procedure		Q'ty	Remarks
Removal Order			Installation is in the reverse order of removal.
(1)	Radiator front grill	1	
(2)	Lower radiator hose	1	
(3)	Fan motor connector	1	
(4)	Siphon tube	1	
(5)	Upper radiator hose	1	
(6)	Radiator mounting bolt	1	
(7)	Collar	1	
(8)	Washer	1	
(9)	Nut	1	
(10)	Radiator mounting bolt/collar	1/1	CAUTION; • Do not damage the radiator fin.
(11)	Radiator	2/2	
(12)	Left radiator side cover bolt	2	
(13)	Left radiator side cover	1	
(14)	Right radiator side cover bolt	2	
(15)	Right radiator side cover	1	