


## Shock Absorber Disassembly/Assembly

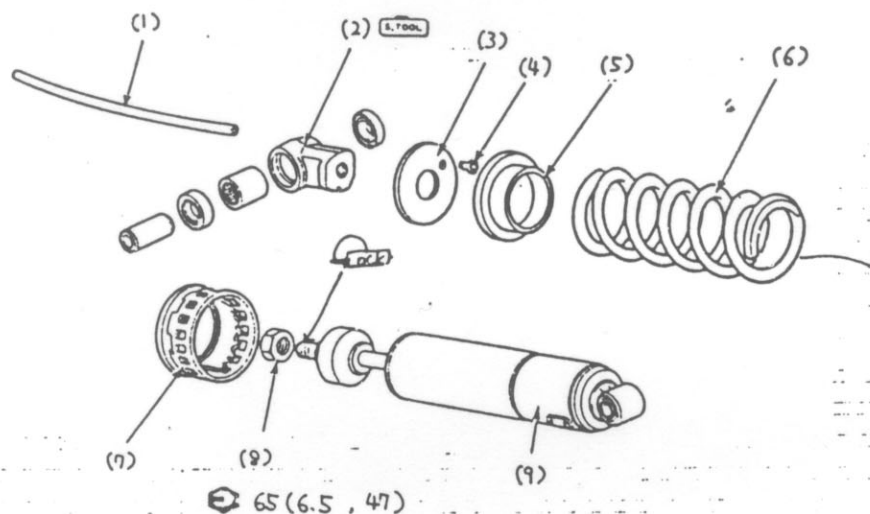

Requisite Service 13-6  
 • Shock absorber removal (page 12-8)

Procedure		Q'ty	Remarks
	Disassembly Order		Assembly is in the reverse order of the disassembly.
(1)	Shock absorber drain tube	1	Loosen the lock nut, then remove the lower joint.
(2)	Lower joint	1	
(3)	Seat stopper	1	Install with the tightly wound end facing up.
(4)	Tube joint	1	
(5)	Spring seat	1	
(6)	Spring	1	
(7)	Spring adjuster	1	
(8)	Lock nut	1	
(9)	Damper unit	1	