


Suspension Linkage Removal/Installation

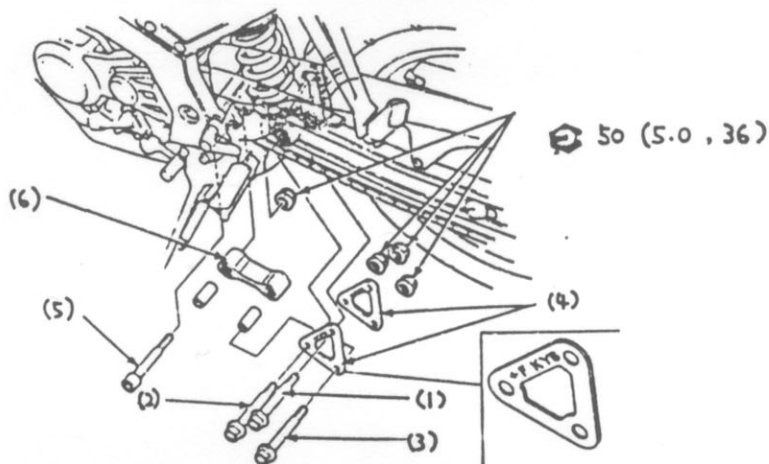

47- M. GREASE ?

Requisite Service

- Support the frame and raise the rear wheel off the ground.

Procedure		Q'ty	Remarks
	Removal Order		Installation is in the reverse order of removal.
(1)	Swingarm mounting bolt/nut: cushion arm side	1/1	
(2)	Shock absorber lower mounting bolt/ nut	1/1	
(3)	Cushion connecting rod mounting bolt /nut: cushion arm side	1/1	
(4)	Cushion arm plate	2	At installation: Position the plate with its "F" mark facing to the front.
(5)	Cushion connecting rod mounting bolt /nut	1/1	
(6)	Cushion connecting rod	1	