


Fork Removal/Installation

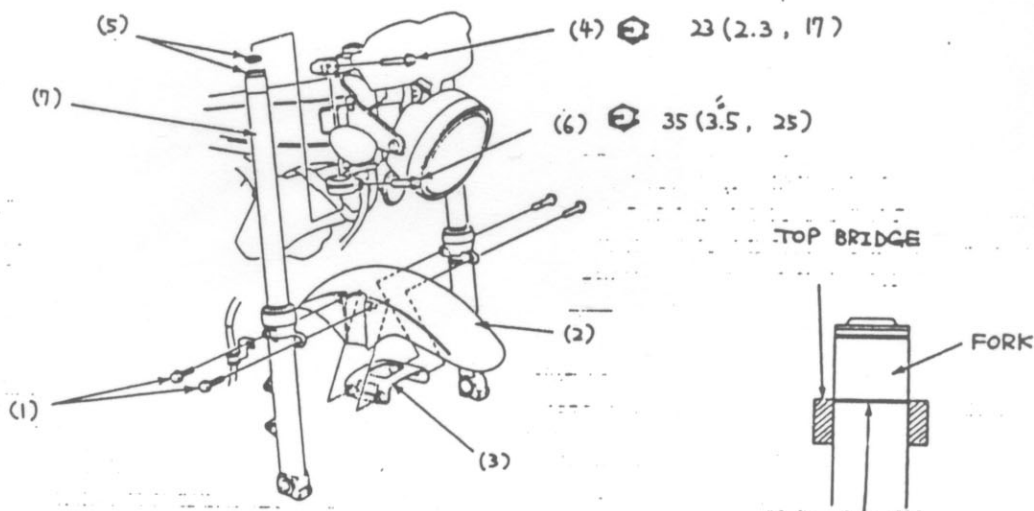

CAUTION:

- Do not support the caliper by the brake hose.

Requisite Service

- Right/Left handlebar removal (page 11-2/9)
- Front brake caliper removal (page 13-9)
- Front wheel removal (page 12-7)

Procedure		Q'ty	Remarks
Removal Order			<i>Installation is in the reverse order of removal.</i>
(1)	Fender mounting bolt	4	
(2)	Fender	1	
(3)	Front stabiliser	1	
(4)	Top bridge pinch bolt	2	Only loosen.
(5)	Fork cap/Fork cap bolt	1/1	
(6)	Bottom bridge pinch bolt	2	Only loosen.
(7)	Fork leg	2	
Installation Order			
(7)	Fork leg	2	Align the fork leg groove with the upper surface of the top bridge.
(4)	Top bridge pinch bolt	2	Temporarily install the top bridge pinch bolts, tighten after the fork cap bolt installation.
(6)	Bottom bridge pinch bolt	1	
(5)	Fork cap bolt/Fork cap	1/1	
(3)	Front stabiliser	1	
(2)	Fender	1	
(1)	Fender mounting bolt	4	